



Expangrout* EP450

Epoxy resin, high strength free flow grout

Uses

Provides a free flow grout, for use in situation where heavy static or dynamic loads are encountered. The gap between a base plate and substrate will need to be filled in such applications as reciprocating machinery, testing equipments, heavy cranes and transporter rails, high speed turbines, centrifuges and drop forges.

Also for use in conditions where chemical spillage may be encountered. Typical situations could be met in steel work, refineries, electroplating works and chemical plants.

Expangrout EP450 is especially suitable where extended working time and /or low exotherm properties are required e.g. for large volume pours, deep gaps or high ambient temperature.

Advantages

- Low creep characteristics under sustained loading
- Excellent durability, high compressive, flexural and tensile strengths ensure a long working life
- Resistant to repetitive dynamic loads.
- Cost effective, high early strength gain promotes minimum downtime and early commissioning of plants.
- Excellent chemical resistant.
- Fast, convenient installation with early strength gain.
- Non-shrink and hence ensure complete surface contact and bond.

Description

Expangrout* EP450 an epoxy resin based product is designed for assisted and free-flow grouting of gaps from 20 mm to 450 mm

Expangrout* EP450 is a low exotherm material which is particularly suitable where long working time is needed

Properties

| Test method | Typical results |
|--|-----------------|
| Expangrout* EP450 | |
| Density (kg/m³) | 2,000 |
| Compressive strength N/mm² ASTM C579 | |
| 1 day | 50 |
| 3 days | 70 |
| 7 days | 90 |
| 28 days | 100 |
| Tensile strength N/mm² ASTM C307 | |
| 7 days | 14 |
| Flexural strength N/mm² ASTM C580 | |
| 7 days | 28 |
| Modulus of elasticity N/mm² ASTM C580 | |
| 7 days | 14.50 |
| Linear shrinkage (%) ASTM C531 | |
| 7 days | 0.076 |
| Linear coefficient of Thermal expansion 10⁻⁶ (mm/mm°C) ASTM C531 | |
| | 46 |
| Linear shrinkage of Cured material ASTM D2566 | |
| | 0.0002 |
| Gel time at 38°C (minutes) ASTM D2471 | |
| | 120 |
| Peak exothermic Temperature at 32°C ASTM D2471 | |
| | 33 |
| Water absorption (%) ASTM C413 | |
| | 0.17 |



CONSTRUCTION CHEMISTRY

Pot life

Ambient temperature affects the time for which bulk material will remain fluid. Typical values in minutes are enclosed.

| Temperature | Pot life in minutes |
|-------------|---------------------|
| 20°C | 160 |
| 30°C | 120 |
| 40°C | 80 |
| 50°C | 40 |

For application outside the above temperature ranges please contact your local Fospak Expanchem office.

Technical support

Expanchem Fospak provides a technical advisory service for on-site assistance and advice on admixture selection, evaluation trials and dispensing equipment.

Instruction for use

Preparation

Concrete surface

The substrate surface must be free from oil, grease or any loosely adherent material. If the concrete surface is defective or has laitance, it must be cut back to a sound base. Bolt holes and fixing pockets must be blown clean of any dirt or debris.

Base plate

It is essential that this is clean and free from oil, grease or scale. Air pressure relief holes should be provided to allow venting of any isolated high spots.

Leveling shims

If these are to be removed after the grout has hardened, they should be treated with a thin layer of grease.

Formwork

The formwork should be constructed to be leak proof. This can be achieved by using foam rubber strip or mastic sealant beneath the constructed formwork and between joints. In some cases it is practical to use sacrificial semi-dry sand and cement formwork.

Unrestrained surface area

This must be kept to a minimum. Generally the gap width between the perimeter formwork and the plate edge should not exceed 75 mm on the pouring side and 25 mm on the opposite side. It is advisable where practical to have no gap at the flank sides.

Mixing

For best results a mechanically powered grout mixer should be used. When quantities up to 20 kg are used, a slow speed drill fitted with Mixing Paddle should be used. To enable the grouting operation to be carried out continuously, it is essential that sufficient mixing capacity and labour are available.

Placing

The mixed grout should be poured steadily from one side only to eliminate the entrapment of air.

Continuous grout flow is essential.

Sufficient grout must be available prior to starting. The time taken to pour a batch should be regulated to the time taken to prepare the next batch.

Flow characteristics

The maximum distance of flow is governed by the gap thickness, the head of grout applied and the ambient temperature.

Continuous grout flow is essential. Sufficient grout must be prepared before starting. The time taken to pour a batch must be regulated to the time taken to prepare the next one.


Pouring should be from one side of the void to eliminate any air. It is advisable to pour the grout across the shortest distance of travel. The grout head must be maintained at all times so that a continuous grout front is achieved.



CONSTRUCTION CHEMISTRY

Typical hopper system

Removable hopper: For larger pours the grout may be hand placed or pumped into a removable hopper.

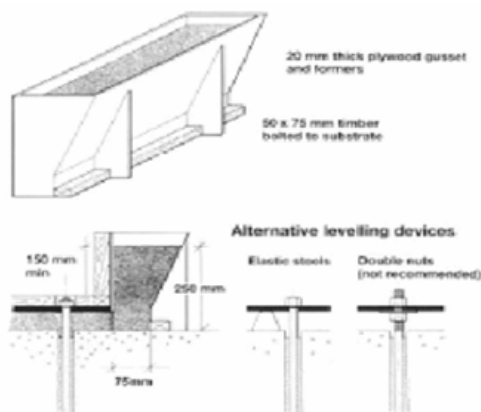

High temperature working

It is suggested that, for temperatures above 40°C, the following guidelines are adopted as good working practice:

- Store unmixed material in a cool (preferably temperature controlled) environment, avoiding exposure to direct sunlight.
- Keep equipment cool, arranging shade protection if necessary. It is especially important to keep cool those surfaces of the equipment which will come into direct contact with the material itself.
- Try to eliminate application during the hottest times of the day and in direct sunlight.
- Make sufficient material, plant and labour available to ensure that application is a continuous process.

Cleaning

Expangrout* EP450 should be removed from tools & equipment with Expanchem Solvent 102 immediately after use. Cured material can be removed mechanically.

Estimating

Supply

Expangrout* EP450 : 20 Kg. pack

Expanchem Solvent 102 : 5 & 25 Ltr. Can

Note:- Allowance should be made for wastage when estimating quantities required.

Storage

Expangrout* EP 450 has a shelf life of 12 months if kept in a dry store in sealed packing. If stored in high temperature locations the shelf life will be reduced.

Limitations

Grouts should not be placed in any unrestrained situation, i.e. base plate plinths, etc. Failure to comply may lead to crack development in the grout.

Expangrout* EP450, grouting may be carried out without any special precaution at ambient temperatures from between 25°C to 45°C.

For low temperatures below 20°C the cure rate may slow, but will go to completion provided the temperature remains above 10°C.

Precaution

Fire

Expanchem Solvent 102 is flammable. In the event of fire extinguish with CO₂ or foam.

Health and safety

Expangrout EP450 contains resin, which may cause sensitization by skin contact. Avoid contact with skin and eyes and inhalation of vapours. Wear suitable protective clothing, gloves and eye / face protection. Barrier cream provide additional skin protection. Should accidental skin contact occur, remove immediately with a resin removing cream, followed by soap and water. Do not use solvent. In case of contact with eyes, rinse immediately with plenty of clean water and seek medical advice, do not induce vomiting.



CONSTRUCTION CHEMISTRY

* Denotes the trademark registered.

REGIONAL SALES OFFICES IN PAKISTAN:

Fospak (Pvt) Ltd.**Head Office**

702, Business Avenue,
Block-6, PECHS., Shahra-e-Faisal,
Karachi, Pakistan.

Tel # +92-21-34528477, 34529859

Fax # +92-21-34522436

Email : info.khi@fospak.com.pk

Lahore Sales Office

2nd Floor Sarwar Shaheed Plaza,
Cavalry Ground,
Main Boulevard, Lahore Cantt,
Lahore, Pakistan.

Tel # +92-42-36675773

Fax # +92-42-36675838

Email : info.lhr@fospak.com.pk

Rawalpindi Sales Office

1st Floor,
Al-Harmain Plaza,
Main Murree Road,
Rawalpindi, Pakistan.

Tel # +92-51-39290592

Fax # +92-51-39290590

Email : info.isb@fospak.com.pk

Important note

Expanchem Fospak products are guaranteed against defective materials and manufacture and are sold subject to its standard terms and conditions of sale, copies of which may be obtained on request. Whilst Expanchem Fospak endeavours to ensure that the technical information on this data sheet is correct at the time of printing, it is the customer's responsibility to satisfy himself, by checking with the company that this information is still current at the time of use, that the product is suitable for the intended application, and that the actual conditions of use are in accordance with those recommended. Because Expanchem Fospak has no control over the conditions of use of its products, all recommendations or suggestions regarding the use of these products are made without guarantee.

www.fospak.com