



Expangrout* GP

General purpose non-shrink cementitious grout

Uses

Expangrout* GP general purpose grouting is used where it is essential to eliminate shrinkage when completely filling the void between a base plate and a substrate. Such an application would be the grouting of a stanchion base plate. It can also be used for anchoring a wide range of fixings. These include masts, anchor bolts and fence posts.

Advantages

- Gaseous expansion system compensates for shrinkage and settlement in the plastic state.
- No metallic iron content to cause staining.
- Prepackaged material overcomes potential on-site batching variations.
- Develops high early strength without the use of chlorides.
- High ultimate strength and low permeability ensure the durability of the hardened grout.

Description

Expangrout* GP cementitious grout is supplied as a ready to use dry powder. The addition of a controlled amount of clean water produces a flowing non-shrink grout for gap thicknesses up to 100 mm. Expangrout* GP is a blend of Portland cement, graded fillers and chemical additives which impart controlled expansion in the plastic state whilst minimising water demand. The low water demand ensures high early strength. The graded filler is designed to assist uniform mixing and produce a consistent grout.

Standards Compliance

Expangrout GP conforms with BS-4551-80, BS-1881 Pt116 ASTM C1107 Grade A, ASTM C469-02

Specification

Performance specification

All grouting where shown on the drawing must be carried out with a pre-packaged cement based product which is chloride-free.

It shall be mixed with clean water to the required consistency. The plastic grout must not bleed or segregate.

A positive volumetric expansion shall occur while the grout is plastic by means of a gaseous system.


The compressive strength of the grout must exceed 45N/mm^2 at 7 days and 60N/mm^2 at 28 days.

The storage, handling and placement of the grout must be in strict accordance with the manufacturer's instructions.

Supplier specification

All grouting where shown on the drawing must be carried out using Expangrout* GP manufactured by Expanchem and used in accordance with the manufacturers data sheet.

Typical detail of stanching base plate

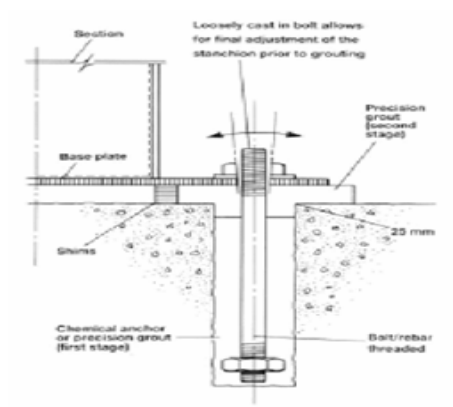



Expangrout* GP can be placed in thicknesses up to 100 mm in a single pour when used as an under plate grout. For thicker sections it is necessary to fill out Expangrout* GP with well graded 10mm, silt free aggregate to minimise exotherm. If bulking with aggregate is used the ratio shall not exceed 1:1. Contact Fospak for details of pre-bagged supply. The properties of a bulked grout will differ from those published in this data sheet.

Any bolt pockets must be grouted prior to grouting between the substrate and the base plate.

Continuous grout flow is essential. Sufficient grout must be prepared before starting. The time taken to pour a batch must be regulated to the time taken to prepare the next one.

Pouring should be from one side of the void to eliminate any air or pre-soaking water becoming trapped under the base plate. It is advisable to pour the grout across the shortest distance of travel. The grout head must be maintained at all times so that a continuous grout front is achieved.

Where large volumes have to be placed Expangrout GP* may be pumped. A heavy duty diaphragm pump is recommended for this purpose. Screw feed and piston pumps may also be suitable.

Curing

On completion of the grouting operation, exposed areas should be thoroughly cured. This should be done by the use of Expancure* curing membrane, or continuous application of water and/or wet hessian.

Cleaning


Expangrout GP* should be removed from tools and equipment with clean water immediately after use. Cured material can be removed mechanically, or with Expanchem Acid Etch*.

Sampling procedure

Cementitious grouts cannot be tested as concrete. Special sampling procedure are required refer to your local Expanchem office for further details.

Typical hopper system

Removable hopper: For larger pours the grout may be hand placed or pumped into a removable hopper.

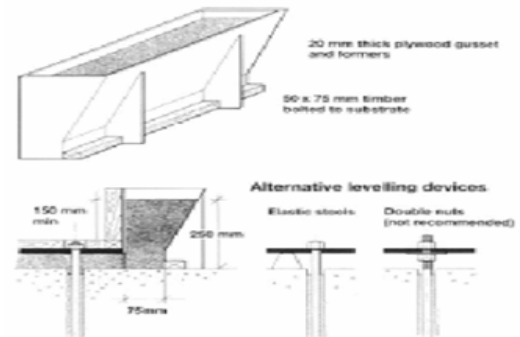

High temperature working

It is suggested that, for temperatures above 35°C, the following guidelines are adopted as good working practice:

- (i) Store unmixed material in a cool (preferably temperature controlled) environment, avoiding exposure to direct sunlight.
- (ii) Keep equipment cool, arranging shade protection if necessary. It is especially important to keep cool those surfaces of the equipment which will come into direct contact with the material itself.
- (iii) Try to eliminate application during the hottest times of the day and in direct sunlight.
- (iv) Make sufficient material, plant and labour available to ensure that application is a continuous process.
- (v) Water (below 20°C) should be used for mixing the grout prior to placement.

Limitations

Grouts should not be placed in any unrestrained situation, i.e. base plate plinths, etc. Failure to comply may lead to crack development in the grout.

Estimating

Supply

Expangrout GP*	: 20 kg bags
----------------	--------------

Yield

Trowellable	: 9.6 liters
-------------	--------------

Flowable	: 10.6 liters
----------	---------------

Note:- Allowance should be made for wastage when estimating quantities required.



Storage

Expangrout GP* has a shelf life of 12 months if kept in a dry store in sealed bags. If stored in high temperature and high humidity locations the shelf life will be reduced.

Precautions

Health and safety

Expangrout GP* is alkaline and should not come into contact with skin and eyes. Avoid inhalation of dust during mixing. Gloves, goggles and dust mask should be worn. If contact with skin occurs, wash with water. Splashes to eyes should be washed immediately with plenty of clean water and medical advice sought.

Fire

Expangrout GP* is non-flammable.

* Denotes the trademark registered.

REGIONAL SALES OFFICES IN PAKISTAN:

Fospak (Pvt) Ltd.

Head Office

702, Business Avenue,
Block-6, PECHS., Shahra-e-Faisal,
Karachi, Pakistan.
Tel # +92-21-34528477, 34529859
Fax # +92-21-34522436
Email : info.khi@fospak.com.pk

Lahore Sales Office

2nd Floor Sarwar Shaheed Plaza,
Cavalry Ground,
Main Boulevard, Lahore Cantt,
Lahore, Pakistan.
Tel # +92-42-36675773
Fax # +92-42-36675838
Email : info.lhr@fospak.com.pk

Rawalpindi Sales Office

1st Floor,
Al-Harmain Plaza,
Main Murree Road,
Rawalpindi, Pakistan.
Tel # +92-51-4575746
Fax # +92-51-9290590
Email : info.isb@fospak.com.pk

Important note

Expanchem Fospak products are guaranteed against defective materials and manufacture and are sold subject to its standard terms and conditions of sale, copies of which may be obtained on request. Whilst Expanchem Fospak endeavours to ensure that the technical information on this data sheet is correct at the time of printing, it is the customer's responsibility to satisfy himself, by checking with the company that this information is still current at the time of use, that the product is suitable for the intended application, and that the actual conditions of use are in accordance with those recommended. Because Expanchem Fospak has no control over the conditions of use of its products, all recommendations or suggestions regarding the use of these products are made without guarantee.

www.fospak.com