

Expanseal* 600



CONSTRUCTION CHEMISTRY

Multi-component, gun and pouring grade, polysulphide sealant

Uses

Sealing movement joints in building and civil engineering structures, including superstructures, reservoirs, floors, basements and subways.

Advantages

A high quality product meeting international standards
Forms a tough, elastic rubber-like seal
Accommodates continuous and cyclic movement
Excellent adhesion to most common substrates
High resistance to ageing reduces physical damage due to climatic extremes

Standards compliance

British Standard BS 4254: 1983.
British Standard BS 6920: 1988 (gun grade grey).
U.S. Federal Specification TT-S-00227E November 1969 (amended 1970).
DTp specification for Highway Works Dec 1991 series 1000 clause 1017.
ASTM C 920-87, Type M, Class 25.

Description

Expanseal* 600 is a multi-component joint sealant, based on a liquid polysulphide polymer, which when mixed and applied, cures to form a tough, rubber-like seal. The cured sealant exhibits excellent adhesion to most surfaces including primed concrete, glass, aluminium and stainless steel. Expanseal* 600 is available in gun and pouring grades. The gun grade is ideal for general application. It is packed in ready to mix, 2.5 liter & 4 liter tins containing the base and curing agent in the correct proportions. The pouring grade for joints in horizontal surfaces is supplied in 4 liter & 5 liter packs with the base and curing agent in separate tins. Both these grades are available in Grey colour only.

Expanseal* 600 is particularly recommended for use in high rise buildings and other applications where access for subsequent maintenance will be difficult and the risk of early movement failure must be minimised. It is also suitable for sealing joints in brickwork, retaining walls, reservoirs, basements and subways. Expanseal* 600 pouring grade is recommended for sealing expansion joints and stress relief joints in floors or other horizontal surfaces.

Specification

Joints shall be sealed using Expanchem Expanseal* 600, two part, polysulphide sealant, manufactured by Expanchem to BS 4254 1983, and ASTM C 920 -87. Joints shall be prepared and the sealant mixed and applied in accordance with the manufacturer's current data sheet.

Design criteria

Expanseal* 600 may be applied to joints between 5 and 50 mm wide. Joints which are expected to experience cyclic movements should be designed to an optimum width:depth ratio of 2:1, subject to the overriding recommended minimum sealant depths set out below:


5 mm for metals, glass and other non-porous surfaces;
10 mm for all porous surfaces;
20 mm for trafficked joints and those subject to hydrostatic pressures.

To ensure that the sealant remains within its stated movement capacity (25% MAF), sealing slot widths should be designed in accordance with the recommendations of BS 6093.

The use of a surface primer is always required on porous surfaces. On non-porous surfaces a primer is not normally required except where glass or glazed surfaces are to be permanently immersed in water.

Example of a sealed movement joint in brickwork/block work is shown below

- 1 Expanseal* 600
- 2 Expancell
- 3 Brickwork
- 4 D.P.C.
- 5 Blockwork

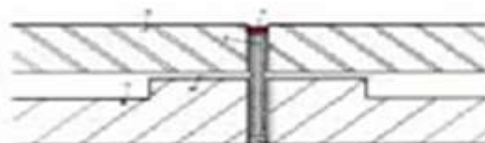



CONSTRUCTION CHEMISTRY

Properties

| | |
|------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Form | : Grey colour, multi-part, paste compound |
| Movement accommodation factor (BS 6093) | : 25% butt joints 50% lap joints |
| Physical or chemical change: | Chemical cure |
| Pot life | : 2 hours @ 25°C 1 hour @ 35°C |
| Setting time | : 36 hours @ 15°C 18 hours @ 25°C 2 hours @ 35°C |
| Cure time | : 2 weeks @ 15°C 1 week @ 25°C 4 days @ 35°C |
| Application temperature | : 5 to 50°C |
| Hardness shore 'A' 25°C | : 15 to 23 |
| Water immersion | : Expanseal* 600 must be fully cured before permanent immersion in water. |
| Biological resistance | : Expanseal* 600 has been evaluated in microbiologically active situations and has been shown to have resistance to aerobic conditions. |
| Solids content | : 100% |
| Density | : 1.62 to 1.73 kg/liter according to colour. |
| Flash point | : Over 65°C |
| Flammability | : Burns but does not readily support combustion. |

Chemical resistance to occasional spillage:

| | |
|----------------------------|-----------|
| Dilute acids | resistant |
| Dilute alkalis | resistant |
| Petrol | resistant |
| Aviation fuels | resistant |
| Diesel fuel | resistant |
| Kerosene | resistant |
| Lubricating oils | resistant |
| Skydrol | resistant |
| White spirit | resistant |
| Chlorinated solvents not | resistant |
| Aromatic solvents not | resistant |
| Dilute oxidising acids not | resistant |

Instructions for use

Joint preparation

The joint surfaces must be thoroughly dry, clean and frost free. Remove all dust and laitance by rigorous wire brushing, grinding or grit blasting. Remove all rust, scale and protective lacquers from metal surfaces. Remove any oil or grease with Expanchem Joint Cleaner.

Any expansion joint filler must be checked to ensure it is tightly packed and no gaps or voids exist at the base of the sealing slot before positioning a bond breaker.

Note: The use of a bond breaker is not required in expansion joints containing Expanchem Expanfill* or Expanrod* bitumen impregnated or polyethylene expansion joint fillers. For construction or contraction joints a bond breaker tape or back-up strip should be used. Where hydrostatic pressure exists, only bond breaking tapes must be used, not foamed back-up strips.

Where a particularly neat finish is required, mask the face edges of the joint before priming and remove immediately after tooling is completed.

Priming

Non-porous surfaces

Use Expanprime 4 on glass, ceramics and metals. The one part chemically active clear liquid is to be applied by brush or pad. One thin coat should be applied and allowed to dry for 2 to 5 minutes prior to sealant application.

Porous surfaces

Expanprime 7: It is a one part high performance chemically active non-toxic liquid for brush application to prime all concrete, stone, brickwork, timber and unglazed edges of ceramic tiles. Apply one thin coat using a clean, dry brush, ensuring complete coverage. Avoid over priming resulting in an excess of primer in the base of the joint or application beyond faces. The mixed Expanseal* 600 must be applied when the primer is tack free, that is after the evaporation of the solvent but before the primer film has completely reacted. After 6 hours @ 20°C, or 3 hours @ 35°C the surfaces must be re-primed before applying the sealant.

Steel surfaces

Iron and steel must be protected with an anti-corrosion primer prior to sealing.



CONSTRUCTION CHEMISTRY

Precautions

Health and safety

Expanseal* 600, Expanprime 4 and Expanprime* 7 should not come in contact with skin and eyes or be swallowed. Avoid breathing of vapour. Splashes must be washed off immediately. Wear impervious rubber or PVC gloves and eye protection. Hands should be thoroughly washed with soap and water before eating or smoking. In the case of eye contact seek medical attention immediately.

Expanseal* 600 curing agent consists of a heavy metal based oxide. Cured sealant should not be burned off due to the generation of toxic fumes. Empty containers must be collected for careful disposal and not left lying about.

Fire

Expanchem Solvent 102 is flammable. Expanprime 4 and Expanprime 7 are highly flammable, store away from heat. Do not use near naked flames or other sources of ignition. No smoking. Use in well ventilated surroundings. In the event of fire, extinguish with CO² foam.

Flash point

Expanprime 4 : 70°C

Expanprime 7 : 80°C

For further information, refer to the Product Material Safety Data Sheet.

*Denotes the trademark registered.

REGIONAL SALES OFFICES IN PAKISTAN:

Fospak (Pvt) Ltd.

Head Office

702, Business Avenue,
Block-6, PECHS., Shakra-e-Faisal,
Karachi, Pakistan.

Tel # +92-21-34528477, 34529859

Fax # +92-21-34522436

Email : info.khi@fospak.com.pk

Lahore Sales Office

2nd Floor Sarwar Shaheed Plaza,
Cavalry Ground,
Main Boulevard, Lahore Cantt,
Lahore, Pakistan.

Tel # +92-42-36675773

Fax # +92-42-36675838

Email : info.lhr@fospak.com.pk

Rawalpindi Sales Office

1st Floor,
Al-Harmain Plaza,
Main Murree Road,
Rawalpindi, Pakistan.

Tel # +92-51-9290592

Fax # +92-51-9290590

Email : info.isb@fospak.com.pk

Important note

Expanchem Fospak products are guaranteed against defective materials and manufacture and are sold subject to its standard terms and conditions of sale, copies of which may be obtained on request. Whilst Expanchem Fospak endeavours to ensure that the technical information on this data sheet is correct at the time of printing, it is the customer's responsibility to satisfy himself, by checking with the company that this information is still current at the time of use, that the product is suitable for the intended application, and that the actual conditions of use are in accordance with those recommended. Because Expanchem Fospak has no control over the conditions of use of its products, all recommendations or suggestions regarding the use of these products are made without guarantee.

www.fospak.com